

Options and Accessories



Turn Signals



Locking Glove Box



Heavy-Duty Bumper/
West Coast Mirror



Canopy Top
White



Fuel Gauge
and Hour Meter



Custom Van Box



Certified ROPS
Cab Enclosure



Hydraulic and Electric
Bed Lift



Safety Strobe Light



Fold-Down
Windshield



2-Inch Rear
Receiver Hitch



Pintle Hitch



Cab Heater



Swisher Dump Cart



50-Gallon Sprayer



Stake-Side Kit



Toolbox



Wheel Covers

Value Packages

	Heavy-Duty Bumper	Headlights	Trailer Hitch	Hour Meter*	Differential Guard	Radio/Beverage Holder	Cargo Box**	Extra-Traction Rear Tires	8.5-Inch Premium Tread Front Tires
Carryall 2Plus Gasoline	Standard	✓	Standard	Standard	✓	✓	Standard	Standard	Standard

*Fuel Gauge/Hour Meter is standard on all gas vehicles listed.
**Priced separately from base vehicle.



Ingersoll Rand is a world leader in the field of compact vehicles and equipment. Our widely known Bobcat® brand includes an extensive line of powerful, nimble compact construction equipment and attachments, and our state-of-the-art engineering capabilities and stylish designs are reflected in our world famous Club Car® vehicles.

1.800.ClubCar • +1 706.863.3000

www.clubcar.com www.bobcat.com www.ingersollrand.com

Club Car

CARRYALL 2^{PLUS}

UTILITY VEHICLE




CARRYALL 2 PLUS

With fully independent front suspension and semi-independent rear suspension, the Carryall 2Plus ensures a smooth, stable ride. Just like the Carryall 2, the 2Plus has Club Car's patented clean-air intake system to draw fresh air from the front of the vehicle. Added



standard features on the Carryall 2Plus include 4-wheel, mechanical drum brakes, a forward speed of 18 mph and a 351 cc, 11.5 hp, key-start engine.

Features

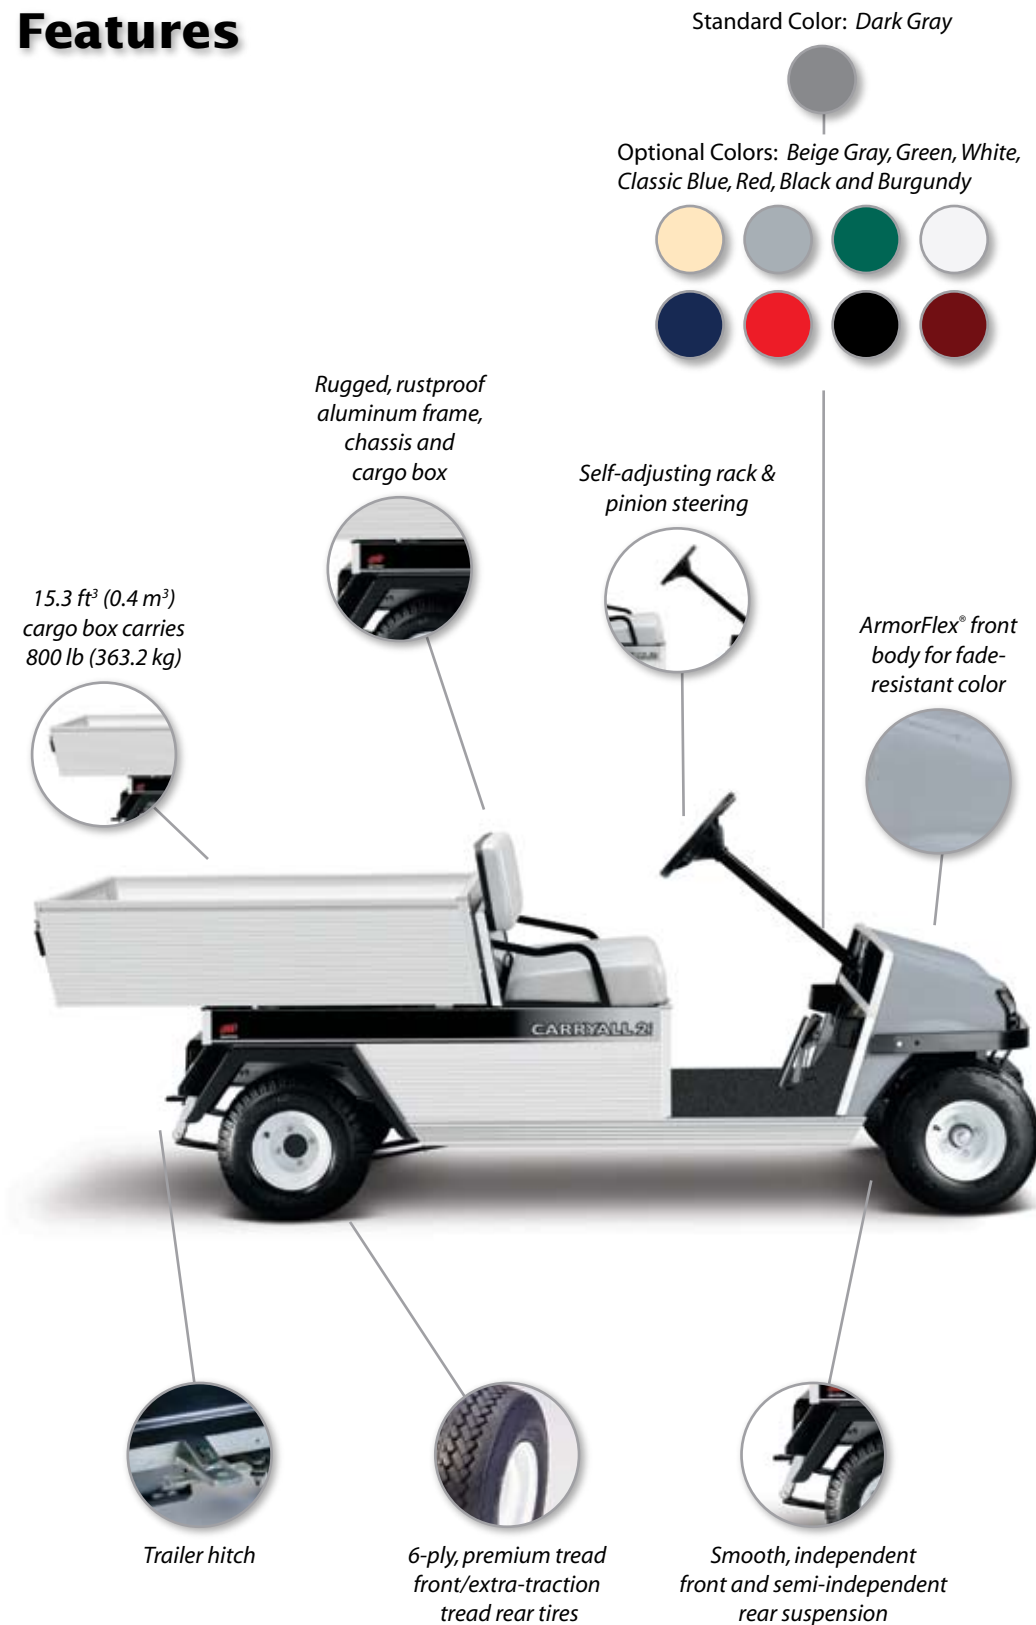

Additional Features

- **Maximum speed of 18 mph (29 kph)**
- **1,200 lb (544.8 kg) total vehicle capacity**
- **11.5 hp @ 3,600 rpm exceeds SAE J1940 Performance Standards**
- **Side fuel fill**
- **Reconfigured dash**
- **4-wheel, mechanical drum brakes**
- **Redesigned hip restraint for maximum styling and comfort**

Specifications

Carryall 2 Plus Gasoline

POWER SUPPLY		
Engine		Kawasaki 4-cycle, OHV, 351 cc single cylinder, air-cooled, pressure-lubricated, spin-on oil filter
Horsepower		11.5*
Governor		Automatic ground speed sensing, Internally geared-in unitized transaxle
Governed RPM		3650 +/- 30
Ignition		Electronic w/electronic RPM limiter
Drive Unit		Unitized transaxle, helical gears: 11.8:1 forward, 17.1:1 reverse
Electrical System		12-volt, 500 cca 105 min. reserve
STEERING/ SUSPENSION		
Steering		Self-adjusting rack & pinion
Front Suspension		Independent leaf spring with dual hydraulic shocks
Rear Suspension		Leaf springs with dual hydraulic shocks
Brakes		Four-wheel mechanical drum
Park Brake		Foot-operated, multi-lock
Stabilizer Bar		Yes
FRAME/CHASSIS		
Frame/Chassis		Aluminum I-Beam
Front Body		ArmorFlex®
Rear Body		All aluminum
Body Finish		Matching paint over molded-in color
Light Package		Optional
Trailer Hitch		Standard
Front Tires		18 x 8.50-8, 6-ply rated, Premium tread
Rear Tires		18 x 8.50-8, 6-ply rated, Extra-Traction tread
Instrumentation		Electronic fuel gauge/hour meter Low-oil warning light
DIMENSIONS		
Cargo Box Size		48.8" x 49.8" x 10.9" (15.3 cf) (123.8 cm x 126.4 cm x 27.6 cm)
Flat Bed Size		46.9" x 48.3" (119.1 cm x 122.7 cm)
Bed Height		27.5" (69.9 cm)
Bed Capacity		800 lb. (363.2 kg)
Total Vehicle Capacity		1200 lb. (544.8 kg)
Overall Length		111" (281.9 cm)
Overall Width		50.0" (127.0 cm)
Overall Height		48.0" (121.9 cm)
Wheelbase		77.5" (196.9 cm)
Ground Clearance Under Differential		4.5" (11.4 cm)
Fuel Tank Capacity		7 gallons (26.6 liters)
Tread		34.5"/38.5" (87.6 cm/97.8 cm)
Dry Weight Less Batteries		747 lb. (339.1 kg)
Maximum Speed		18 mph (29 kph)
Outside Clearance Circle		20.7 ft. (6.3 m) dia.
Turning Radius		10 ft. (3 m)
Intersecting Aisle Radius		77" (195.6 cm)
Vehicle Warranty		2-year limited

*Exceeds SAE J1940 Performance Standards

